


LAUNCH




TLT240 Series *2-Post Lifts • 9,000 lbs Capacity*

Economical, high quality, clear floor and floor plate chain-over lifts with dual point lock release, steel pulleys, high strength equalization cables and double telescoping screw pads configured to accommodate the smallest Cars to the SUV's and Trucks. The TLT240SC clear floor lift is width adjustable and may be installed in a standard or rotated column configuration. Both lifts come with a one (1) year limited warranty.

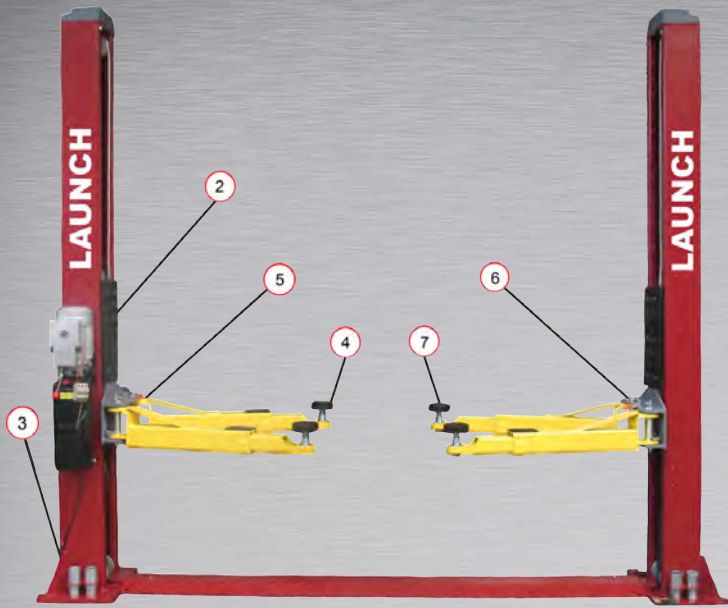

TLT 240SB
Symmetric
Floor Plate
Two Post Lift

Blue available for special order

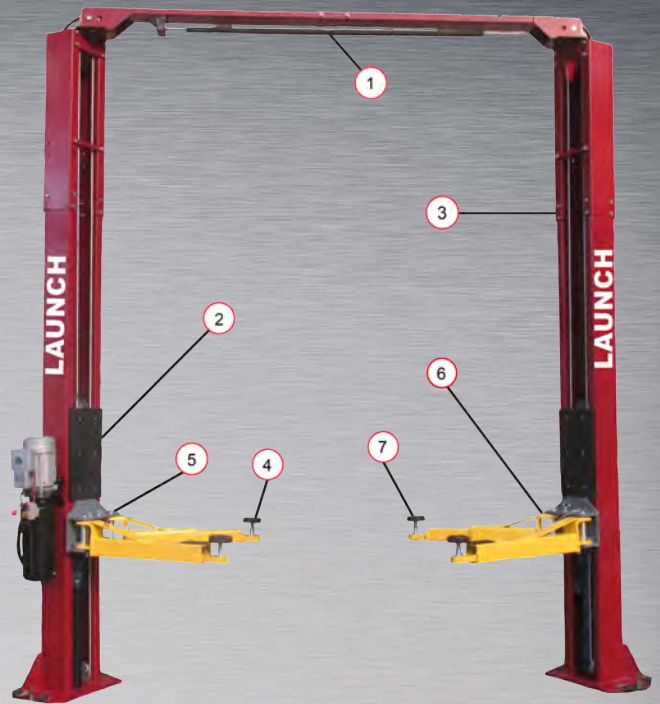


TLT 240SC
Symmetric/Asymmetric
Clear Floor
Two Post Lift



1




2



3



4



5




7


TLT 240 Series

Features & Benefits

- 1 **Adjustable Column Width** - Provides extra 6" of width adjustment for narrow service bays to custom fit your shop (TLT240SC Only).
- 2 **Rubber Door Guards** - Provides added security against door damage.
- 3 **Hose Guards** - Protects hydraulic hoses from damage.
- 4 **Stackable Foot Pad Extensions** - Extra tall applications are no problem with the four 3.5" extensions
- 5 **Dual Point Lock Release** - Allows technicians to disengage both column locks independently.
- 6 **Heavy-Duty Arm Restraint System** - Oversize rugged steel gears, pins, and springs for trouble free operation.
- 7 **Double Telescoping Screw Pads** - Used with rubber pads offering 2.5" adjustment for complete vehicle coverage.
- 8 ***Standard Asymmetric** - Lift installed with columns facing each other.
- 9 ***Rotated Asymmetric** - Lift installed with columns offset - rotated.



8



9

*Available for TLT 240SC Only

Specifications

	TLT 240SB	TLT 240SC
Capacity	9,000 lbs	9,000 lbs
Height Overall	113"	151"
Width Overall w/Power Unit	133"	Symmetric: 134" Asymmetric: 140"
Max. Lift Height	73"	73"
Width Between Columns	108"	108"
Min. Pad Height	4"	4"
Asymmetric/Symmetric	Symmetric	Symmetric/Asymmetric
Drive Thru Clearance	98"	Symmetric: 98" Asymmetric: 95"
Lifting Speed	50 Seconds	50 Seconds
Clear Floor/Floor Plate	Floor Plate	Clear Floor
Front Arm Reach	31.5" - 47.2"	23.6" - 43.5"
Rear Arm Reach	Same	34" - 54"
Narrow Bay Setting	N/A	Deduct 5.9"
Max Load Per Arm	2,250 lbs	2,250 lbs
Cable Diameter	3/8"	3/8"
Column Size	11.34" x 7.5"	11.34" x 7.5"
Column Steel Thickness	6mm	6mm
Carriage Steel Thickness	6mm	6mm
Arm Steel Thickness	6mm, 8mm	6mm, 8mm
Ship Weight	1,380 lbs	1,500 lbs
Ship Dimensions	113"L x 21-1/2"W x 43"H	110"L x 24"W x 48"H
Power	208-230 Volt/60hz./Single Phase	208-230 Volt/60hz./Single Phase

Additional Height Extensions Available

LAUNCH